
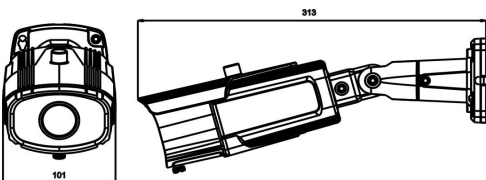


Product Picture:		Hardware			
		Image Sensor	1/2.8" Progressive Scan CMOS		
		Effective Pixels	1920(H)×1080(V)		
Product Features: <ul style="list-style-type: none"> •1/2.8" Progressive Scan CMOS •2.0 Megapixel, 30fps@1920*1080 •2.7-13.5mm(Motorized & One Push), 2pcs IR Array LED for 60M, IR ON 0.001 Lux, 140dB TWDR •Support ONVIF Profile S, FTP, RTSP, UPnP etc. •Support Dual-Stream, Mobile Surveillance, Heartbeat Mechanism, 3D-DNR, Defogging, D-WDR, Lens Correction, Corridor Monitoring etc. •RJ45, DC 12V, Easy-to-install bracket included •Option: SD card slot, Alarm I/O, Audio I/O, RS485, POE 		Interface			
		Optical lens	Interfaces	\$ 14	
			Iris	Fixed Iris	
			Focal Length	2.7-13.5mm(Motorized & One Push)	
		Audio Talkback		1ch MIC external access, 3.5mm AV interface (Optional)	
		Audio Output		1ch speaker output, 3.5mm AV interface (Optional)	
		Network Port	Lan	10/100M BASE-TX, RJ-45 connector	
		RS485		1*RS485 interface (Optional)	
		Alarm I/O		1ch alarm input, 1ch alarm output (Optional)	
		Micro SD		Max. 128G (Optional)	
Application Scenarios: Government, intelligent community, hospital, road, transportation, school, prison, military district etc.		Audio&Video encoding			
		Video Compression		H.265/H.264/MJPEG	
				H.265 encoding: Main Profile	
				H.264 encoding: High Profile/Main Profile/Baseline	
		Resolution	Main Stream	1920*1080/1280*720; 1~30fps(adjustable)	
			Sub Stream	704*576/640*480/640*352/320*240; 1~30fps(adjustable)	
		Video Bitrate		30Kbps~16Mbps, Supports CBR/VBR	
		OSD Settings		Text overlay supported like title, time, date, week, bitrate and etc. OSD location is adjustable	
		Privacy Mask		4 configurable regions	
		Image Orientation		Image Flip and Mirror	
		Auto Image Control Functions		Auto Exposure Control (AEC); Auto White Balance (AWB); Auto Gain Control(AGC)	
		Image Controls		Saturation, Brightness, Contrast, Hue, Sharpness, Gamma, D-WDR	
		Others		Anti Fogging/Anti Trembling/IR Detection/IRIS/	
Audio Compression		G.711A/G.711U/G.726			
Two Way Audio		Support			
Order Type: DS-HD8632Z		Data transmission and storage			
		Data storage	Video and Image		
		Recording	Auto recording and manual recording (motion & sensor alarm recording, scheduled recording)		
		Alarm output	FTP, E-mail		
		Network protocols	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, FTP, NTP, PPPOE, SMTP, UPNP		
Wireless protocols(-W)		-----			
ONVIF Protocols		PROFILE S			
Remote View	PC	IE 6.0 above			
	Mobile Phone	-----			
	User Access	Maximum 5 users			
Outline Dimension: 		General Parameters			
		Environmental Casing	Aluminum Alloy Housing, Indoor and Outdoor Applicable		
Installation		Ceiling Mounted & Wall Mounted			
Operating Temperature		-10 °C ~ 50 °C			
Operating Humidity		0% -85% RH			
Power		DC12V ±10%			
POE		Support			
Power Consumption		<12w(IR ON)			
Dimension		L313XW101XH70mm			
Weight		965g			