
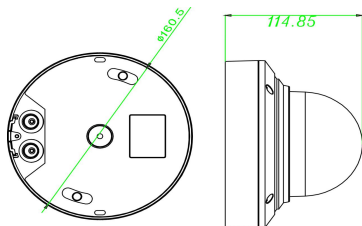


Product Picture: 	Hardware	
	Image Sensor	1/2.8" SONY EXMOR Progressive Scan CMOS SENSOR
	Effective Pixels	1920(H)×1080(V)
	Interface	
	Optical lens	Interfaces
		\$ 14
		Iris
		Fixed Iris
		Focal Length
		2.7-13.5mm(Motorized & One Push)
	Audio Talkback	
	1ch MIC external access, 3.5mm AV interface	
	Audio Output	
	1ch speaker output, 3.5mm AV interface	
	Network Port	Lan
	10/100M BASE-TX, RJ-45 connector	
	RS485	
	1*RS485 interface	
	Alarm I/O	
	2ch alarm input, 1ch alarm output	
	Micro SD	
	Max. 128G	
Product Features: <ul style="list-style-type: none"> ●1/2.8" SONY EXMOR Progressive Scan CMOS SENSOR ●2.0 Megapixel, 30fps@1920*1080 ●2.7-13.5mmmm(Motorized & One Push), 3pcs IR Array LED for 30M, IR ON 0.001 Lux, 140dB TWDR ●Support ONVIF Profile S, FTP, RTSP, UPnP etc. ●Support Dual-Stream, Mobile Surveillance, Heartbeat Mechanism, 3D-DNR, Defogging, D-WDR, Lens Correction, Corridor Monitoring etc. ●Built-in MIC, Audio I/O, Dual Alarm In, Single Alarm Out, SD card slot(Max. 128G), RS485、RJ45, DC 12V,POE ●Vandal-proof, Weather-proof, IK10 	Audio&Video encoding	
	Video Compression	H.265/H.264/MJPEG
		H.265 encoding: Main Profile
		H.264 encoding: High Profile/Main Profile/Baseline
	Resolution	Main Stream
		1920*1080/1280*720; 1~30fps(adjustable)
		Sub Stream
	704*576/640*480/640*352/320*240; 1~30fps(adjustable)	
	Video Bitrate	
	30Kbps~16Mbps, Supports CBR/VBR	
	OSD Settings	
	Text overlay supported like title, time, date, week, bitrate and etc.	
	OSD location is adjustable	
	Privacy Mask	
	4 configurable regions	
	Image Orientation	
	Image Flip and Mirror	
	Auto Image Control Functions	
	Auto Exposure Control (AEC); Auto White Balance (AWB); Auto Gain Control(AGC)	
	Image Controls	
	Saturation, Brightness, Contrast, Hue, Sharpness, Gamma, D-WDR	
	Others	
	Anti Fogging/Anti Trembling/IR Detection/IRIS/	
	Audio Compression	
	G.711A/G.711U/G.726	
	Two Way Audio	
	Support	
Application Scenarios: Supermarket, hotel, airport, office building etc.	Data transmission and storage	
	Data storage	Video and Image
	Recording	Auto recording and manual recording (motion & sensor alarm recording, scheduled recording)
	Alarm output	FTP, E-mail
	Network protocols	TCP/IP、UDP、RTP、RTSP、RTCP、HTTP、DNS、DDNS、DHCP、FTP、NTP、PPPOE、SMTP、UPNP
Order Type: DS-HD6372ZR	Wireless protocols(-W) -----	
	ONVIF Protocols	
	PROFILE S	
	Remote View	PC
		IE 6.0
		Mobile Phone

		User Access
	Maximum 5 users	
Outline Dimension: 	General Parameters	
	Environmental Casing	Aluminum Alloy Housing, Indoor and Outdoor Applicable
	Installation	Ceiling Mounted & Wall Mounted
	Operating Temperature	-10 °C ~ 50 °C
	Operating Humidity	0% -85% RH
	Power	DC12V ±10%
	POE	Support
	Power Consumption	<3.5W, IR ON<9W
	Dimension	Φ161mmxH115mm
	Weight	965g