
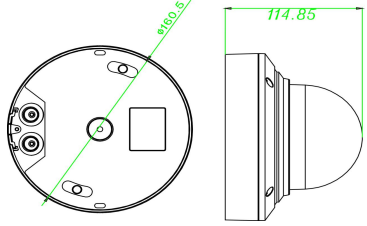


Product Picture: 	Hardware			
	Image Sensor	1/1.8" SONY EXMOR Progressive Scan CMOS sensor		
	Effective Pixels	1920(H)×1080(V)		
	Interface			
	Optical lens	Interfaces		
		\$ 14		
		Iris	Fixed Iris	
		Focal Length	3.6-10mm(mm(Motorized & One Push))	
	Audio Talkback		1ch MIC external access, 3.5mm AV interface	
	Audio Output		1ch speaker output, 3.5mm AV interface	
	Network Port	Lan	10/100M BASE-TX, RJ-45 connector	
	RS485		1*RS485 interface	
	Alarm I/O		2ch alarm input, 1ch alarm output	
	Micro SD		Max. 128G	
Product Features: <ul style="list-style-type: none"> ●1/1.8" SONY EXMOR Progressive Scan CMOS sensor ●2.0 Megapixel, 30fps@1920*1080 ●3.6-10mm(Motorized & One Push), 3pcs IR Array LED for 30M,IR ON 0.001 Lux, 140dB TWDR ●Support ONVIF Profile S, FTP, RTSP, UPnP etc. ●Support Dual-Stream, Mobile Surveillance, Heartbeat Mechanism, 3D-DNR, Defogging, D-WDR, Lens Correction, Corridor Monitoring etc. ●Built-in MIC, Audio I/O, Dual Alarm In, Single Alarm Out, SD card slot(Max. 128G), RS485, RJ45, DC 12V,POE ●Vandal-proof, Weather-proof, IK10 	Audio&Video encoding			
	Video Compression		H.265/H.264/MJPEG	
			H.265 encoding: Main Profile	
			H.264 encoding: High Profile/Main Profile/Baseline	
	Resolution	Main Stream	1920*1080/1280*720; 1~30fps(adjustable)	
		Sub Stream	704*576/640*480/640*352/320*240; 1~30fps(adjustable)	
	Video Bitrate		30Kbps~16Mbps, Supports CBR/VBR	
	OSD Settings		Text overlay supported like title, time, date, week, bitrate and etc.	
			OSD location is adjustable	
	Privacy Mask		4 configurable regions	
	Image Orientation		Image Flip and Mirror	
	Auto Image Control Functions		Auto Exposure Control (AEC); Auto White Balance (AWB); Auto Gain Control(AGC)	
	Image Controls		Saturation, Brightness, Contrast, Hue, Sharpness, Gamma, D-WDR	
	Others		Anti Fogging/Anti Trembling/IR Detection/IRIS/	
	Audio Compression		G.711A/G.711U/G.726	
	Two Way Audio		Support	
Application Scenarios: Supermarket, hotel, airport, office building etc.	Data transmission and storage			
	Data storage		Video and Image	
	Recording		Auto recording and manual recording (motion & sensor alarm recording, scheduled recording)	
	Alarm output		FTP, E-mail	
	Network protocols		TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, FTP, NTP, PPPOE, SMTP, UPNP	
Order Type: DS-HD6372ZRH	Wireless protocols(-W)		-----	
	ONVIF Protocols		PROFILE S	
	Remote View	PC	IE 6.0 above	
		Mobile Phone	-----	
		User Access	Maximum 5 users	
Outline Dimension: 	General Parameters			
	Environmental Casing		Aluminum Alloy Housing, Indoor and Outdoor Applicable	
	Installation		Ceiling Mounted & Wall Mounted	
	Operating Temperature		-10 °C ~ 50 °C	
	Operating Humidity		0% -85% RH	
	Power		DC12V ±10%	
	POE		Support	
	Power Consumption		<3.5W, IR ON<9W	
	Dimension		Φ161mmxH115mm	
	Weight		965g	