
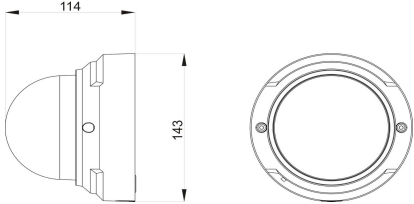


Product Picture		Hardware		
	Image Sensor	1/2.8" SONY EXMOR Progressive Scan CMOS SENSOR		
	Effective Pixels	1920(H)×1080(V)		
	NPU	1.2 Tops		
	Interface			
	Optical lens	Interfaces	\$ 14	
		Iris	Fixed Iris	
		Focal Length	2.7-13.5mm (Motorized) lens	
	Audio Talkback	1ch MIC external access, 3.5mm AV interface		
	Audio Output	1ch speaker output, 3.5mm AV interface		
	Network Port	Lan	10/100M BASE-TX, RJ-45 connector	
	RS485	1*RS485 interface		
	Alarm I/O	2ch alarm input, 1ch alarm output		
Micro SD	Support upto 128G			
Product Features:		Audio&Video encoding		
<ul style="list-style-type: none"> ●1/2.8" SONY Exmor CMOS ●2.0 Megapixel, 30fps@1920*1080 ●2.7-13.5mm (Motorized) lens, 0.001 Lux,140dB TWDR ●face capture algorithm (support face capture function, support for detecting, tracking, capturing, and screening of moving faces, outputting superior face capture) ●Support protocols: PROFILE S, GB/T28181, FTP/RTSP,UPNP etc. ●Support three Stream, Mobile Surveillance, Heartbeat Mechanism, 3D-DNR, Defogging, D-WDR, Lens Correction, Corridor Monitoring etc. ●built-in Mic, Support Audio I/O, dual Alarm in/ single Alarm in out, RS485, SD card slot(128G), RJ45,DC 12V 		Video Compression	H.265/H.264/MJPEG H.265 encoding: Main Profile H.264 encoding: High Profile/Main Profile/Baseline	
		Resolution	Main Stream	1920*1080/1280*720; 1~60fps(adjustable)
			Sub Stream	704*576/640*480/640*352/320*240; 1~60fps(adjustable)
		Video Bitrate	30Kbps~16Mbps, Supports CBR/VBR	
		OSD Settings	Text overlay supported like title, time, date, week, bitrate and etc. OSD location is adjustable	
		Privacy Mask	4 configurable regions	
		Image Orientation	Image Flip and Mirror	
		Auto Image Control Functions	Auto Exposure Control (AEC); Auto White Balance (AWB); Auto Gain Control(AGC)	
		Image Controls	Saturation, Brightness, Contrast, Hue, Sharpness, Gamma, D-WDR	
		Others	Anti Fogging/Anti Trembling/IR Detection/IRIS/	
		Audio Compression	G.711A/G.711U/G.726	
		Two Way Audio	Support	
Application Scenarios:		Data transmission and storage		
Supermarket, hotel, airport, office building etc.		Data storage	Video and Image	
		Recording	Auto recording and manual recording (motion & sensor alarm recording, scheduled recording)	
		Alarm output	FTP, E-mail	
		Network protocols	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, FTP, NTP, PPPOE, SMTP, UPNP	
Order Type:		Wireless protocols(-W) -----		
DS-AI6362ZR		ONVIF Protocols	PROFILE S	
		Remote View	PC	IE 6.0 above
			Mobile Phone	-----
			User Access	Maximum 5 users
Outline Dimension:		General Parameters		
		Environmental Casing	Aluminum Alloy Housing, Indoor Applicable	
		Installation	Ceiling Mounted & Wall Mounted	
		Operating Temperature	-10 °C ~ 50 °C	
		Operating Humidity	0% -85% RH	
		Power	DC12V	
		POE	Support	
		Power Consumption	<3.5W	
		Dimension	Φ143xH114mm	
		Weight	655g	